

04/01/99

**UTILITY
PATENT APPLICATION
TRANSMITTAL**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

35.C8672 CONT. II

First Named Inventor or Application Identifier

MASAKI OKADA

Express Mail Label No.

J 625 U.S. PTO

09/283285

04/01/99

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:Assistant Commissioner for Patents
Box Patent Application
Washington, DC 202311. ☒ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)2. ☒ Specification Total Pages 3. ☒ Drawing(s) (35 USC 113) Total Sheets 4. ☒ Oath or Declaration Total Pages a. ☐ Newly executed (original or copy)b. ☐ Unexecuted for information purposesc. ☒ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]i. ☐ **DELETION OF INVENTOR(S)**
Signed Statement attached deleting
inventor(s) named in the prior application,
see 37 CFR 1.63(d)(2) and 1.33(b).5. ☒ Incorporation By Reference (useable if Box 4c is checked)
The entire disclosure of the prior application, from which a copy of
the oath or declaration is supplied under Box 4c, is considered as
being part of the disclosure of the accompanying application and is
hereby incorporated by reference therein.6. ☐ Microfiche Computer Program (Appendix)7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)a. ☐ Computer Readable Copyb. ☐ Paper Copy (identical to computer copy)c. ☐ Statement verifying identity of above copies**ACCOMPANYING APPLICATION PARTS**8. ☐ Assignment Papers (cover sheet & document(s))9. ☐ 37 CFR 3.73(b) Statement ☒ Power of Attorney
(when there is an assignee)10. ☐ English Translation Document (if applicable)11. ☒ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations12. ☒ Preliminary Amendment13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)14. ☐ Small Entity Statement(s) ☐ Statement filed in prior application
Status still proper and desired15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)16. ☐ Other: _____

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:



Continuation



Divisional



Continuation-in-part (CIP)

of prior application No. 08/320,833, filed
10/7/94, now allowed.**18. CORRESPONDENCE ADDRESS**

Customer Number or Bar Code Label

05514

(Insert Customer No. or Attach bar code label here)



or Correspondence address below

NAME

Address

City

State

Zip Code

Country

Telephone

Fax



CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS (37 CFR 1.16(c))	6 -20 =	0	X \$ 18.00 =	\$00.00
	INDEPENDENT CLAIMS (37 cfr 1.16(b))	2 -3 =	0	X \$ 78.00 =	\$00.00
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))			\$260.00 =	\$00.00
				BASIC FEE (37 CFR 1.16(a))	\$760.00
				Total of above Calculations = \$760.00	
	Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).				
	TOTAL =				\$760.00

19. Small entity status


- a. ☐ A Small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.

20. ☒ A check in the amount of \$ 760.00 to cover the filing fee is enclosed.

21. ☐ A check in the amount of \$ _____ to cover the recordal fee is enclosed.

22. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☐ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED	
NAME	RICHARD P. BAUER, REG. NO. 31,588
SIGNATURE	
DATE	APRIL 1, 1999

F501\W179271\dew

35.C8672 CONT. II

PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:)
MASAKI OKADA) Examiner: A. Sniezek
Appln. No.: To be assigned) Group Art Unit: 2753
Filed: April 1, 1999)
For: RECORDING APPARATUS AND)
REPRODUCTION APPARATUS : April 1, 1999

[This application is a continuation
of U.S. Patent Appln. No. 08/320,833,
filed Oct. 7, 1994, now allowed]

Assistant Commissioner for Patents
Washington, D.C. 20231

**PRELIMINARY AMENDMENT
AND INFORMATION DISCLOSURE STATEMENT**

Sir:

Prior to examination on the merits, kindly amend
the above-identified application as follows:

IN THE TITLE:

Kindly amend the title to read --RECORDING AND
REPRODUCING APPARATUS STORING DATA OF A NUMBER OF
SUB-FRAMES--.

IN THE SPECIFICATION:

Page 1

Line 22, change "equip" to --have--; and
Line 25, change "realize" to --produce--.

Page 2

Line 3, change "is" to --has been--; and
Line 10, after "of" insert --the--.

Page 6

Line 2, change "instructing" to
--controlling--;
Line 4, change "instructing" to
--controlling--;
Line 6, change "instructing" to
--controlling--; and
Line 9, change "instructing" to
--controlling--.

Page 9

Line 18, change "canceled" to --cancelled--.

IN THE ABSTRACT OF THE DISCLOSURE:

Page 19

Line 5, delete the paragraph format.

IN THE CLAIMS:

Kindly cancel Claims 1-12 without prejudice.

Kindly add new Claims 16-18 as follows:

--16. A reproduction method comprising the steps of:

reproducing data from a medium on which multi-frame data and data of a number of frames comprising said multi-frame data are recorded; and

processing said multi-frame data on the basis of the data of the number of frames reproduced in said reproducing step.

17. A method according to Claim 16, wherein the medium comprises a magnetic disk.

18. A method according to Claim 16, wherein the multi-frame data comprises compressed data.--

REMARKS

Consideration and allowance of the subject application are respectfully requested.

Claims 13-18 are pending in the application.
Claims 13 and 16 are independent.

1 Recording Apparatus and Reproduction Apparatus

BACKGROUND OF THE INVENTION

Field of the Invention

5 The present invention relates to a recording apparatus and a reproduction apparatus for a still image.

Related Background Art

10 As a still image recording medium, a still video floppy utilized in a still video camera (or an electronic still camera) is known. The recording format of the still video floppy is standardized by the still video committee, and the floppy records a video signal for one field per track. A standard floppy has
15 50 tracks. Therefore, the floppy can record a maximum of 50 field images, and can record 25 frame images. The still video floppy also has audio and data recording formats in addition to the still image recording format.

20 Digital circuit elements have become popular due to low-cost memories, and an electronic still camera tends to equip a memory capable of storing image data for at least one frame, and a digital signal processor (DSP) for performing digital signal processing of image
25 data stored in the memory. The DSP can easily realize a multi-frame image in which a plurality of images are

1 arranged in one frame. The DSP can also easily
enlarge/reduce an image.

However, in the prior art, it is difficult to
individually reproduce and display images recorded as a
5 multi-frame image. For example, the number of images
constituting a multi-frame image or the number of
photographed images included in a multi-frame image
cannot be detected unless these images are reproduced
and displayed. Also, it is not easy to designate and
10 display each of images constituting a multi-frame image
in an enlarged scale.

SUMMARY OF THE INVENTION

It is an object of the present invention to
provide a recording apparatus and a reproduction
15 apparatus which can solve the above-mentioned problems.

It is another object of the present invention to
provide a recording apparatus and a reproduction
apparatus which have improved operability.

It is still another object of the present
20 invention to provide a recording apparatus and a
reproduction apparatus which have novel functions.

According to one preferred aspect of the present
invention, there is provided a recording apparatus for
recording images to be recorded as a multi-frame image
25 on a recording medium, wherein at least one of
information indicating the number of split frames of
the multi-frame image and information indicating the

1 number of recording images included in the multi-frame
image is recorded on the recording medium.

Other objects and features of the present
invention will be apparent from the following
5 description of the embodiment taken in conjunction with
the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing an arrangement
according to an embodiment of the present invention;

10 Fig. 2 is a partial flow chart showing an
operation of this embodiment;

Fig. 3 is a partial flow chart showing the
operation of this embodiment;

15 Fig. 4 is a partial flow chart showing the
operation of this embodiment;

Fig. 5 is a flow chart showing a changing
operation in a recording mode of this embodiment; and

Figs. 6A to 6D are views showing examples of
displayed frames of this embodiment.

20 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

The preferred embodiment of the present invention
will be described below with reference to the
accompanying drawings.

Fig. 1 is a block diagram showing an arrangement
25 of an apparatus according to the embodiment of the
present invention. The apparatus shown in Fig. 1
includes a photographing lens 10, a diaphragm 12, an

1 image pickup element 14, an image pickup processing
circuit 16 for sampling and holding the outputs from
the image pickup element 14, performing gamma
correction and white balance adjustment, and outputting
5 an image signal in a predetermined format, an A/D
converter 18 for converting an analog signal into a
digital signal, a memory 20 having a storage capacity
of at least one frame, a digital signal processor (DSP)
22 for performing digital signal processing (e.g.,
10 enlargement/reduction processing) of a photographed or
reproduced image by utilizing the memory 20, a D/A
converter 24 for converting a digital output from the
DSP 22 into an analog signal, a recording processing
circuit 26 for performing recording processing such as
15 FM modulation of the output signal from the D/A
converter 24, a switch 28 which is connected to a
contact a in a recording mode, and is connected to a
contact b in a reproduction mode, a magnetic head 30
for recording/reproduction, a magnetic disc 32 called a
20 still video floppy, and a motor 34 for rotating the
magnetic disc 30.

The apparatus also includes a reproduction
processing circuit 36 for performing reproduction
processing such as FM demodulation of an output
25 reproduced by the magnetic head 30 input through the
switch 28, a switch 38 for supplying the output from
the reproduction processing circuit 36 or the output

1 from the image pickup processing circuit 16 to the A/D
converter 18, and a video encoder 40 for converting the
output from the D/A converter 24 into a standard
television signal (e.g., an NTSC television signal),
5 and supplying its output to, e.g., an internal or
external monitor device.

The apparatus also includes an ID generation
circuit 37 for generating a data signal (to be
described later) to be recorded together with data,
10 i.e., a video signal output from a system control
circuit 42 (to be described later), an adder 39 for
adding the output from the D/A converter 24 to the
output from the ID generation circuit 37, and an ID
discrimination circuit 41 for extracting an ID signal
15 from a reproduction signal.

The apparatus also includes a system control
circuit 42 for controlling the entire apparatus, a
clock generation circuit 44 for supplying predetermined
clocks to the image pickup element 14, the image pickup
20 processing circuit 16, the A/D converter 18, the memory
20, the DSP 22, and the D/A converter 24 under the
control of the system control circuit 42, a photometry
sensor 46 for exposure control, a liquid crystal
display device 48, and a light-emitting diode 50.

25 The apparatus further includes a
recording/reproduction switch 52 for switching between
the recording mode and the reproduction mode, a

1 multi-frame switch 54 for setting a multi-frame mode,
an up switch 56 for instructing track movement of the
magnetic head 30 in the inner peripheral direction, a
down switch 58 for instructing track movement of the
5 magnetic head 30 in the outer peripheral direction, a
photographing preparation switch 60 for instructing
preparation for a photographing operation (exposure
control and focusing control), and a photographing
switch 62 for instructing exposure of the image pickup
10 element 14. Normally, when a release button is
slightly depressed, the photographing preparation
switch 60 is turned on, and when the release button is
further depressed, the photographing switch 62 is
turned on.

15 In this embodiment, when the multi-frame switch 54
is ON, the multi-frame mode is set. For example, in
the recording mode, the DSP 22 reduces a photographed
image to $1/n$ in an area ratio (e.g., $n = 16$) by
thinning out pixels (by, e.g., orthogonally
20 transforming input image data to quantize or mask
high-frequency components with a large coefficient).
In this case, n can be changed by the up switch 56 and
the down switch 58. The compression ratio of the DSP
22 can be changed according to the change in n . For
25 this purpose, for example, the pixel thinning out ratio
or the coefficient for quantizing frequency components
can be changed.

1 The fundamental signal flow in Fig. 1 will be
briefly described below.

5 The image pickup element 14 is exposed by the
photographing preparation switch 60 and the
photographing switch 62, and its output is subjected to
gamma correction and video signal conversion by the
image pickup processing circuit 16. The output from
the image pickup processing circuit 16 is supplied to
the A/D converter 18 through the switch 38, and is
10 converted into a digital signal. The DSP 22 writes the
output from the A/D converter 18 in the memory 20
without any modifications or by compressing the output
as described above.

15 Image data stored in the memory 20 is read out,
and is supplied to the D/A converter 24 through the DSP
22. The memory 20 consists of first and second areas
each having a storage capacity for one frame (or
field). The D/A converter 24 converts a digital image
signal into an analog image signal, and the recording
20 processing circuit 26 performs recording processing of
the output from the D/A converter 24. The output from
the recording processing circuit 26 is supplied to the
magnetic head 30 through the switch 28, and is recorded
on the magnetic disc 32.

25 In the reproduction mode, the output from the
magnetic head 30 is supplied to the reproduction
processing circuit 36 through the switch 28, and the

1 reproduction processing circuit 36 outputs a reproduced
image signal. The reproduced image signal output from
the reproduction processing circuit 36 is supplied to
the A/D converter 18 through the switch 38. The A/D
5 converter 18 converts the reproduced image signal into
a digital signal, and the DSP 22 writes the output from
the A/D converter 18 without any modifications or in an
enlarged scale. The output from the magnetic head 30
is also supplied to the ID discrimination circuit 41.
10 The ID discrimination circuit 41 separates and extracts
an ID signal superposed on the image signal, and
outputs the extracted ID signal to the system control
circuit 42.

Image data written in the memory 20 is read out,
15 and is supplied to the D/A converter 24 through the DSP
22. The D/A converter 24 converts the image data into
an analog signal. The video encoder 40 converts the
output from the D/A converter 24 into a standard
television signal, and the output from the video
20 encoder 40 is displayed as an image on a monitor
device.

The operation of this embodiment will be described
below with reference to the flow charts shown in
Figs. 2, 3, and 4. Note that Figs. 2, 3, and 4 are
25 flow charts when the memory 20 has a storage capacity
for two frames (or fields).

1 When the recording/reproduction switch 52 is set
in the recording mode (S1), the system control circuit
42 clears the memory 20, and resets its internal
counter m to 0 (S2). When the photographing
5 preparation switch 60 is turned on (S3), preparation of
a photographing operation such as a photometry
operation based on the output from the photometry
sensor 46 is performed (S4). When the photographing
switch 62 is turned on (S5), and the multi-frame switch
10 54 is not ON (S6), the image pickup element 14 is
exposed, and a photographed image is recorded on the
magnetic disc 32 (S7), thus ending the processing.

 If the multi-frame mode is set (i.e., the
multi-frame switch 54 is ON) (S6), a photographed image
15 obtained by the image pickup element 14 is stored in
the first area of the memory 20 (S8), and the control
waits until the photographing switch 62 is temporarily
turned off (S9). If the multi-frame mode is canceled
(S10), the image in the first area is recorded on the
20 magnetic disc 32 (S11), thus ending processing. If the
multi-frame mode is set (S10), the image in the first
area is reduced to $1/n$ in the area ratio, and the
reduced image is stored at a position corresponding to
m in the second area of the memory 20 (S27).
25 Thereafter, m is incremented by one (S28). When $n = m$
(S29), i.e., when an images for one frame is stored in
the second area, the image in the second area is

1 recorded on the magnetic disc 32 (S30), thus ending
processing. The flow returns to step S3 to continue
photographing operation until $m = n$ (S29).

When the image in the second area is to be
5 recorded on the magnetic disc (S30), the ID generation
circuit 37 is caused to generate an ID signal including
information such as values n and m , a date, a track
number, and the like, and the ID signal is recorded at
the same time. In this embodiment, when $n \neq m$,
10 monochrome images having uniform brightness are
recorded in portions having no photographed images.

A position where the reduced image is stored in
step S27 is a position corresponding to a frame
position shown in, e.g., Fig. 6A or 6B. For example,
15 when $m = 0$, the image is stored at a position #1; when
 $m = 1$, the image is stored at a position #2; and when m
 $= 15$, the image is stored at a position #16.

If $m = 0$ (S24) before the photographing
preparation switch 60 is turned on (S4) or before the
20 photographing switch 62 is turned on (S5) even after
the photographing preparation switch 60 is turned on
and the preparation for the photographing operation is
performed, the flow returns to step S3 to wait until
the photographing preparation switch 60 is turned on.
25 Once a photographing operation is performed in the n
times multi-frame mode, and image information is stored
in the second area of the memory 20, i.e., when $m \neq 0$

1 (S24), and the n times multi-frame mode is canceled
(S25), or when the recording mode is canceled even in
the n times multi-frame mode (S25, S26), the image in
the second area is recorded on the magnetic disc 32
5 (S30), thus ending processing.

When the recording/reproduction switch 52 is set
in the reproduction mode (S12), normal reproduction
processing is executed (S14) if the n times multi-frame
mode is not selected. If the n times multi-frame mode
10 is selected (S13), multi-mode reproduction processing
is executed (S15). More specifically, an image is
enlarged to n times in the area ratio (i.e., to a full
frame size) according to the value n of reproduced
images included in the ID signal output from the ID
15 discrimination circuit 41, and the enlarged image is
stored in the memory 20. The image stored in the
memory 20 is then reproduced and output. In this case,
the image is reproduced and output according to the
value m like in the recording mode. For example, m (1
20 in this case) is displayed on the upper right corner of
the frame, as shown in Fig. 6C.

When the up switch 56 is turned on (S16), if $n \neq m$
+ 1, m is incremented, and an image of m is reproduced
and output (S19). If $n = m + 1$, an image of $m = 0$ of
25 the next track is reproduced and output (S20).

When the down switch 58 is turned on (S18), if $m =$
0, an image of $m (= n - 1)$ of the immediately preceding

1 track is reproduced and output (S23); if $m \neq 0$, m is
decremented, and an image of m is reproduced and output
(S22).

In this embodiment, in the multi-frame
5 reproduction mode, an image to be reproduced is
enlarged to a full frame size, but may be simply
arranged at the center of the frame without being
enlarged. Fig. 6D shows a display example in a 4 times
multi-frame reproduction mode. "MULT 4" represents
10 that the 4 times multi-frame reproduction mode is
selected. "1-1" displayed on the upper right corner
represents that an image of $m = 0$ in the track #1 is
reproduced. In this case, the outer frame portion of a
displayed image is preferably displayed in a single
15 color having uniform brightness.

Since n and m are recorded at the same time in the
recording mode, a non-photographed image in a
multi-frame image can be easily discriminated, and the
reproduction/output operation of the corresponding
20 image can be skipped.

Needless to say, in the recording mode, when $m >$
0, n of the n times multi-frame mode is inhibited from
being changed.

Fig. 5 is a flow chart showing a changing
25 operation in the recording mode when the memory 20 has
a storage capacity of only one frame (or field).

1 When the recording/reproduction switch 52 is set
in the recording mode (S31), the system control circuit
42 clears the memory 20, and resets its internal
counter m to 0 (S32). If the n times multi-frame mode
5 is not selected (S33), a normal photographing operation
is executed (S34).

 If the n times multi-frame mode is selected (S33),
and if the photographing preparation switch 60 is
turned on (S35), the preparation for the photographing
10 operation is performed (S36). When the photographing
switch 62 is turned on (S37), a photographed image
obtained by the image pickup element 14 is reduced to
1/n, and the reduced image is stored in the memory 20
(S38). Then, m is incremented by one (S39), and if n =
15 m (S40), the images in the memory 20 are recorded on
the magnetic disc 32 (S43), thus ending processing; if
n ≠ m (S40), the control waits until the photographing
preparation switch 60 is turned on (S35).

 If the n times multi-frame mode is canceled (S41)
20 before the photographing preparation switch 60 is
turned on (S35), or before the photographing switch 62
is turned on (S37) even after the photographing
preparation switch 60 is turned on and the preparation
for the photographing operation is performed, or if the
25 recording mode is canceled even in the n times
multi-frame mode (S41, S42), the image in the memory 20

1 is recorded on the magnetic disc 32 (S43), thus
encoding processing.

According to this embodiment, even when no
magnetic disc 32 is loaded, one or a plurality of
5 images are temporarily stored in the memory 20, and
thereafter, can be recorded on the magnetic disc 32.
Therefore, a photographing operation can be performed
without the magnetic disc 32.

In the above embodiment, the magnetic disc is used
10 as a recording medium. Of course, the present
invention may be applied to a recording or reproduction
apparatus using a solid-state memory device, an optical
recording medium, or a magnetooptical recording medium.
When a solid-state memory is used in a digital image
15 recording mode, an ID signal can be digitally recorded
simultaneously with image recording.

As can be easily understood from the above
description, according to this embodiment, individual
images in a multi-frame image can be easily reproduced
20 in an enlarged scale.

1 WHAT IS CLAIMED IS:

1. A recording apparatus comprising:
first recording means for recording given input image
data on a medium as multi-frame data; and
5 second recording means for recording, on said
medium, information indicating the number of split
frames of the multi-frame data recorded on said medium
by said first recording means.

10 2. An apparatus according to claim 1, wherein
said medium comprises a magnetic disc.

3. An apparatus according to claim 1, further
comprising:
15 compression means for compressing said image data;
and
means for forming the multi-frame data using the
image compressed by said compression means.

20 4. An apparatus according to claim 1, wherein
said first and second recording means perform recording
operations using a common recording head.

5. An apparatus according to claim 1, further
25 comprising:
reproduction means for reproducing the multi-frame
data recorded on said medium.

1 6. An apparatus according to claim 3, wherein
said compression means includes:
transform means for orthogonally transforming said
input image data; and
5 quantization means for quantizing data
orthogonally transformed by said transform means.

7. A recording apparatus comprising:
first recording means for recording given input image
10 data on a medium as multi-frame data; and
second recording means for recording, on said
medium, data of the number of frames included in the
multi-frame data recorded on said medium by said first
recording means.

15 8. An apparatus according to claim 7, wherein
said medium comprises a magnetic disc.

9. An apparatus according to claim 7, further
20 comprising:
compression means for compressing said image data;
and
means for forming the multi-frame data using the
image compressed by said compression means.

25

1 10. An apparatus according to claim 7, wherein
said first and second recording means perform recording
operations using a common recording head.

5 11. An apparatus according to claim 7, further
comprising:
reproduction means for reproducing the multi-frame
data recorded on said medium.

10 12. An apparatus according to claim 9, wherein
said compression means includes:
transform means for orthogonally transforming said
input image data; and
quantization means for quantizing data
15 orthogonally transformed by said transform means.

13. A reproduction apparatus comprising:
reproduction means for reproducing data from a
medium on which multi-frame data and data of number
20 of frames constituting said multi-frame data are
recorded; and
processing means for processing said multi-frame
data on the basis of the data of the number of frames
reproduced by said reproduction means.

25 14. An apparatus according to claim 13, wherein
said medium comprises a magnetic disc.

1 15. An apparatus according to claim 13, wherein
said multi-frame data is compressed data.

5

10

15

20

25

1 ABSTRACT OF THE DISCLOSURE

Individual images included in a multi-frame image can be reproduced in an enlarged scale by an easy operation.

5 Information indicating the number of split frames of a multi-frame image and information indicating the number of photographed images included in the multi-frame image are recorded on a recording medium together with images constituting the multi-frame
10 image. In the reproduction mode, each of images constituting the multi-frame image is reproduced and output on one frame with reference to the reproduced information indicating the number of split frames of the multi-frame image and the reproduced information
15 indicating the number of photographed images included in the multi-frame image.

20

25

FIG. 1

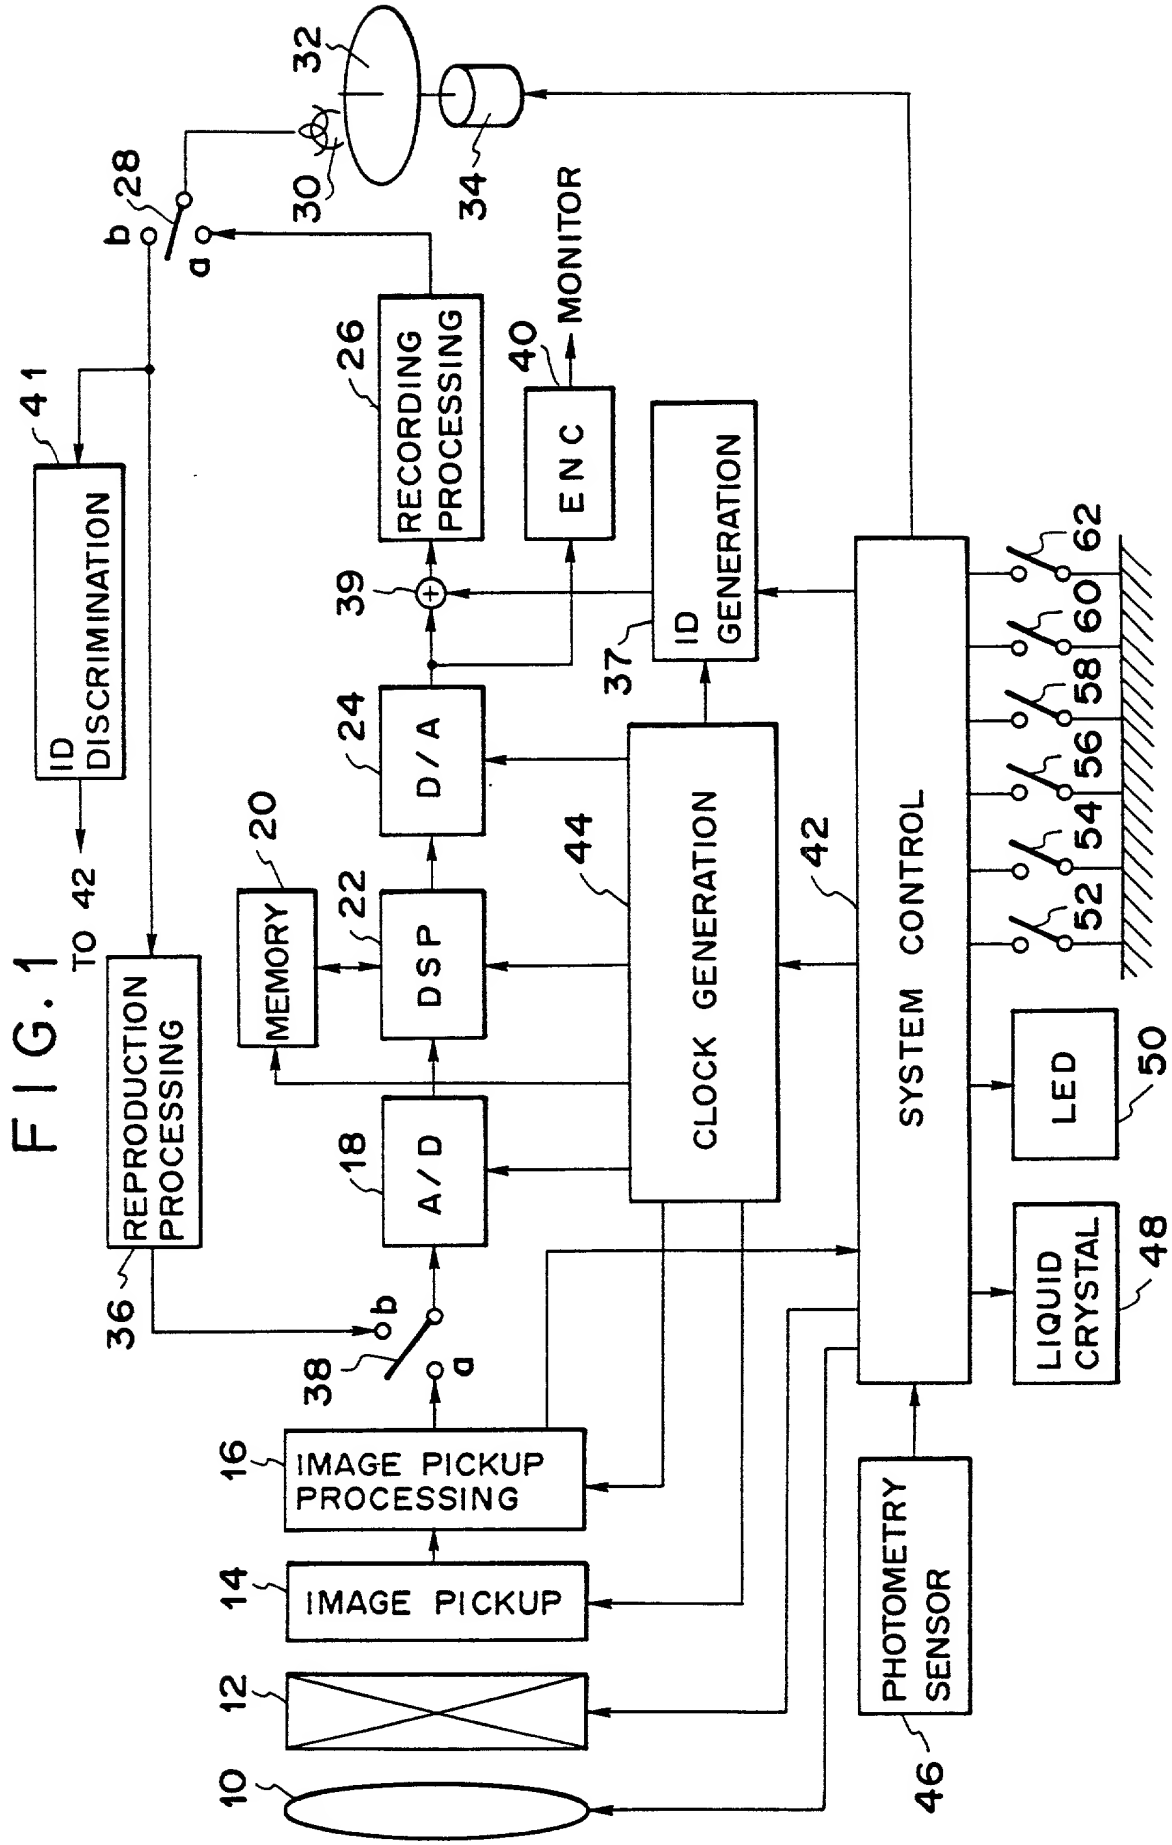


FIG. 3

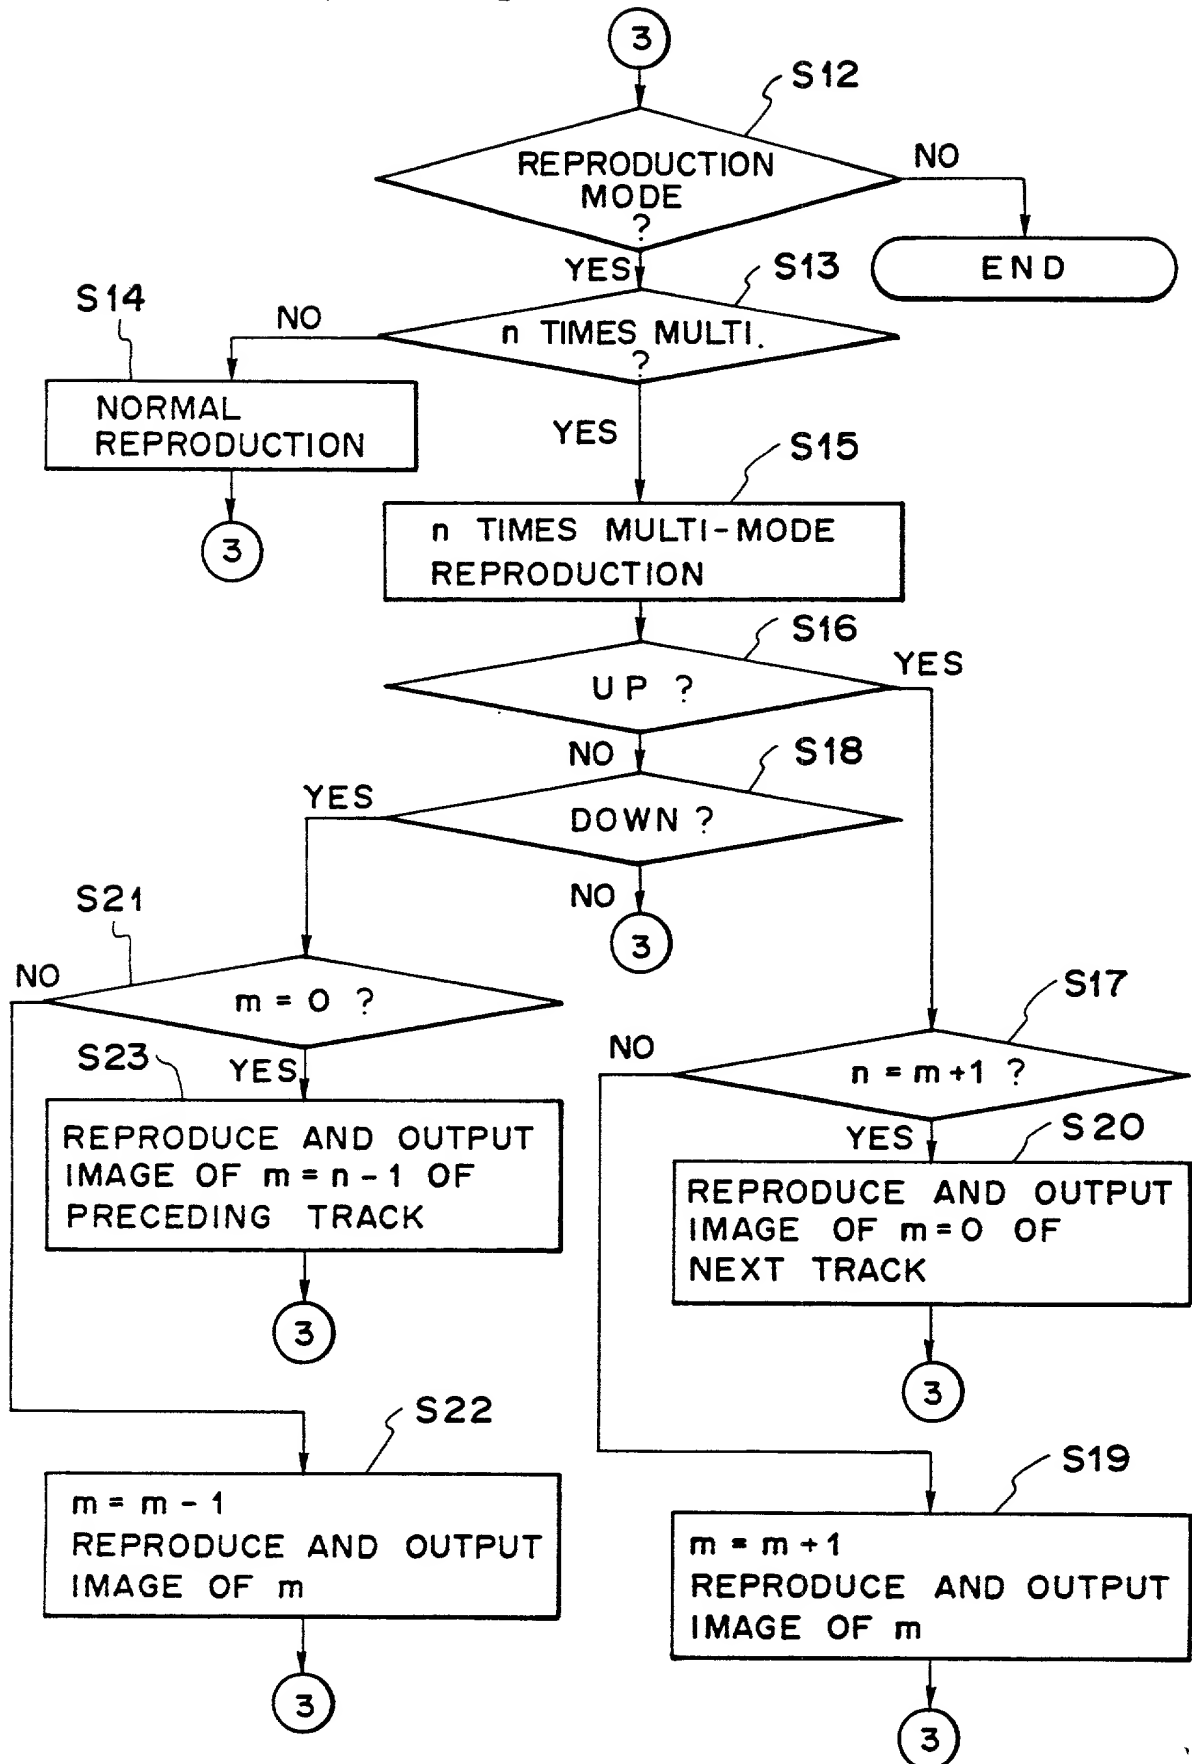


FIG. 4




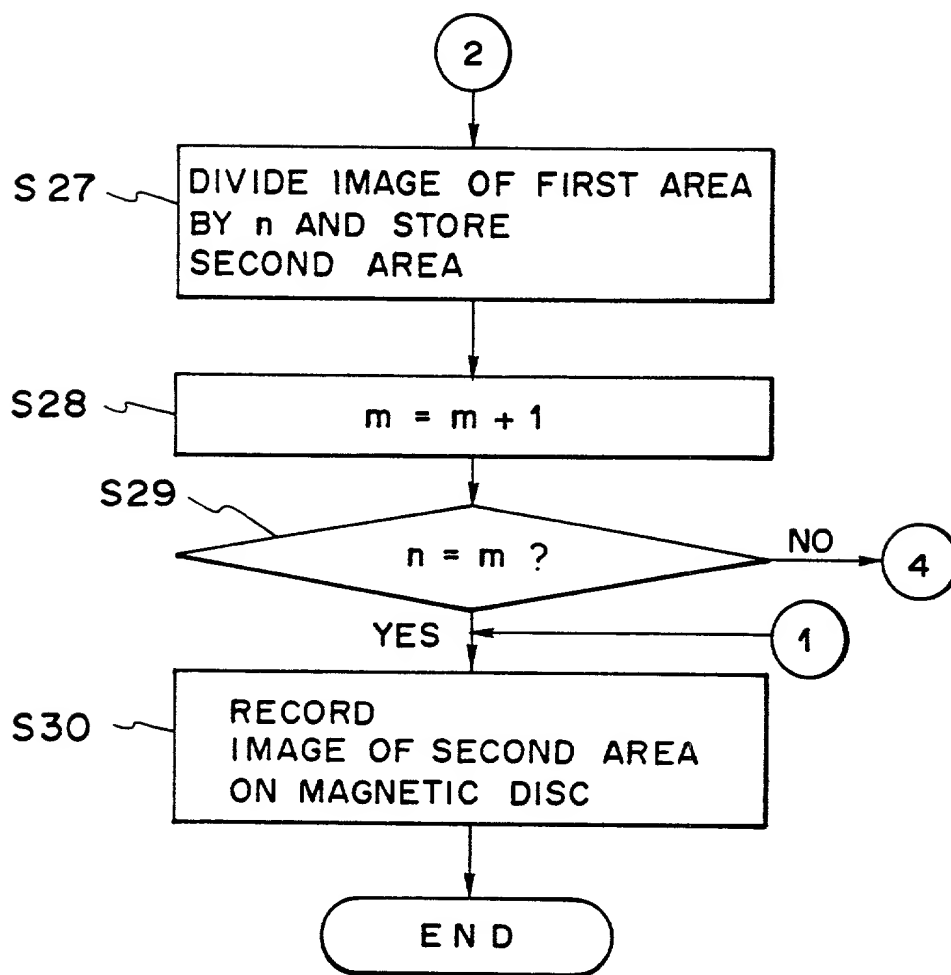


FIG. 5

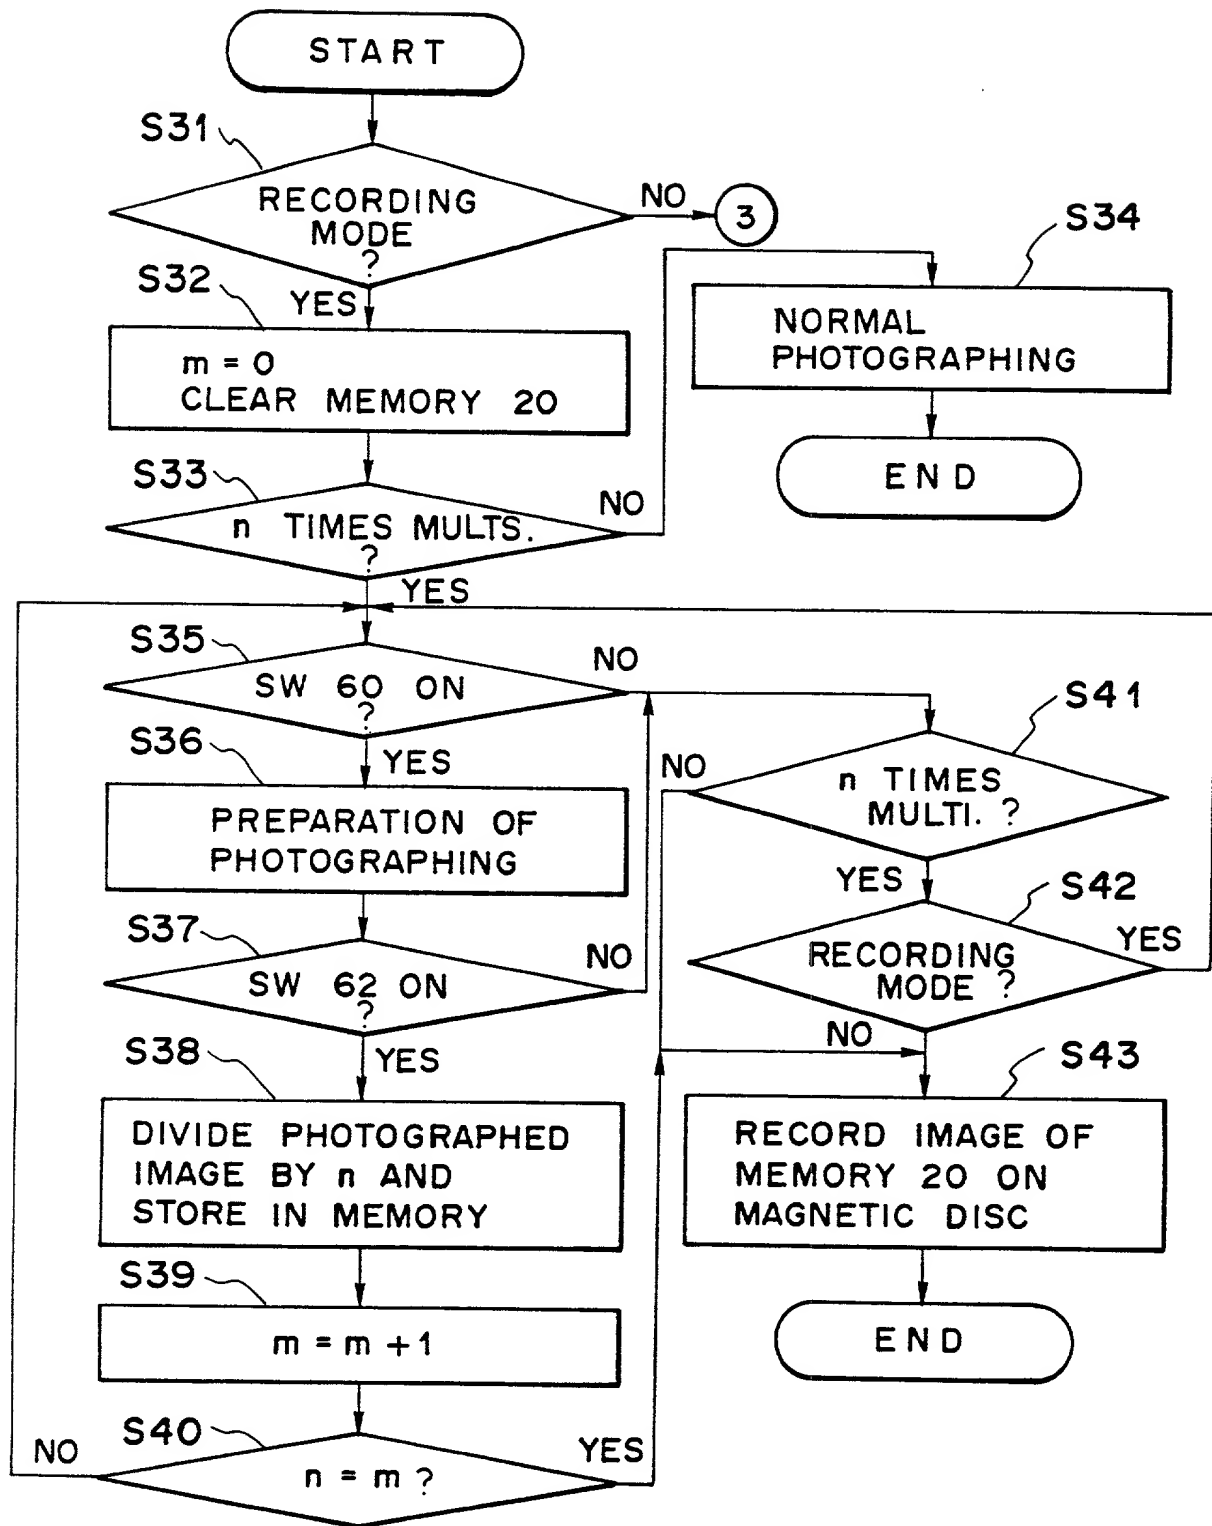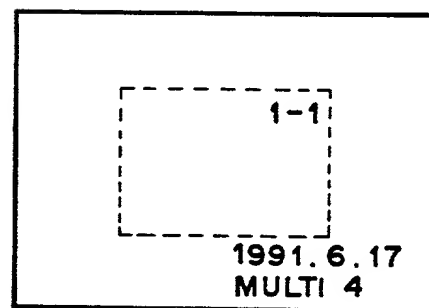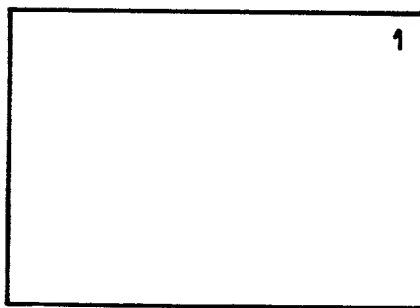

Parameter	Value	Unit	Parameter	Value	Unit
α	0.0001		β	0.0001	
γ	0.0001		δ	0.0001	
ϵ	0.0001		ζ	0.0001	
η	0.0001		θ	0.0001	
ι	0.0001		κ	0.0001	
λ	0.0001		μ	0.0001	
ν	0.0001		ξ	0.0001	
\omicron	0.0001		π	0.0001	
ρ	0.0001		σ	0.0001	
τ	0.0001		υ	0.0001	
ϕ	0.0001		χ	0.0001	
ψ	0.0001		ω	0.0001	
Ω	0.0001		Θ	0.0001	
Φ	0.0001		Υ	0.0001	
Ψ	0.0001		Ξ	0.0001	
Σ	0.0001		Π	0.0001	
Λ	0.0001		Γ	0.0001	
Γ	0.0001		Δ	0.0001	
Δ	0.0001		Σ	0.0001	
Σ	0.0001		Π	0.0001	
Π	0.0001		Γ	0.0001	
Γ	0.0001		Δ	0.0001	
Δ	0.0001		Σ	0.0001	
Σ	0.0001		Π	0.0001	
Π	0.0001		Γ	0.0001	
Γ	0.0001		Δ	0.0001	
Δ	0.0001		Σ	0.0001	
Σ	0.0001		Π	0.0001	
Π	0.0001		Γ	0.0001	
Γ	0.0001		Δ	0.0001	
Δ	0.0001		Σ	0.0001	
Σ	0.0001		Π	0.0001	
Π	0.0001		Γ	0.0001	
Γ	0.0001		Δ	0.0001	
Δ	0.0001		Σ	0.0001	
Σ	0.0001		Π	0.0001	
Π	0.0001		Γ	0.0001	
Γ	0.0001		Δ	0.0001	
Δ	0.0001		Σ	0.0001	
Σ	0.0001		Π	0.0001	
Π	0.0001		Γ	0.0001	
Γ	0.0001		Δ	0.0001	
Δ	0.0001		Σ	0.0001	
Σ	0.0001		Π	0.0001	
Π	0.0001		Γ	0.0001	
Γ	0.0001		Δ	0.0001	
Δ	0.0001		Σ	0.0001	
Σ	0.0001		Π	0.0001	
Π	0.0001		Γ	0.0001	
Γ	0.0001		Δ	0.0001	
Δ	0.0001		Σ	0.0001	
Σ	0.0001		Π	0.0001	
Π	0.0001		Γ	0.0001	
Γ	0.0001		Δ	0.0001	
Δ	0.0001		Σ	0.0001	
Σ	0.0001		Π	0.0001	
Π	0.0001		Γ	0.0001	
Γ	0.0001		Δ	0.0001	
Δ	0.0001		Σ	0.0001	
Σ	0.0001		Π	0.0001	
Π	0.0001		Γ	0.0001	
Γ	0.0001		Δ	0.0001	
Δ	0.0001		Σ	0.0001	
Σ	0.0001		Π	0.0001	

FIG. 6CFIG. 6D

**COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION**

As a below named inventor, I hereby declare that :

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled RECORDING APPARATUS AND
REPRODUCTION APPARATUS

_____, the specification of which
☒ is attached hereto. ☐ was filed on _____ as Application
Serial No. _____
and was amended _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Country	Application No.	Filed (Day/Mo./Yr.)	Priority Claimed (Yes/No)
JAPAN	3-217020	28 August 1991	Yes

I hereby appoint Joseph M. Fitzpatrick (Registration No. 17,398), Lawrence F. Scinto (Registration No. 18,973), William J. Brunet (Registration No. 20,452), Robert L. Baechtold (Registration No. 20,860), John A. O'Brien (Registration No. 24,367), Nels T. Lippert (Registration No. 25,888), John A. Krause (Registration No. 24,613), Henry J. Renk (Registration No. 25,499), Peter Saxon (Registration No. 24,947), Anthony M. Zupic (Registration No. 27,276), Charles P. Baker (Registration No. 26,702), Stevan J. Bosses (Registration No. 22,291), Edward E. Vassallo (Registration No. 29,117), Ronald A. Clayton (Registration No. 26,718), Lawrence A. Stahl (Registration No. 30,110), Laura A. Bauer (Registration No. 29,767), Leonard P. Diana (Registration No. 29,296), David M. Quinlan (Registration No. 26,641), Nicholas N. Kallas (Registration No. 31,530), William M. Wannisky (Registration No. 28,373), Lawrence Alaburda (Registration No. 31,583), Lawrence S. Perry (Registration No. 31,865), Robert H. Fischer (Registration No. 30,051), Christopher Philip Wrist (Registration No. 32,078), Gary M. Jacobs (Registration No. 28,861), Michael K. O'Neill (Registration No. 32,622), Bruce C. Haas (Registration No. 32,734), Scott K. Reed (Registration No. 32,433), Scott D. Malpede (Registration No. 32,533), John A. Mitchell (Registration No. 19,032), Fredrick M. Zullo (Registration No. 32,452), Richard P. Bauer (Registration No. 31,588), Eric B. Janofsky (Registration No. 30,759), Warren E. Olsen (Registration No. 27,290), Abigail F. Cousins (Registration No. 29,292), Alan W. Fiedler (Registration No. 33,690), Jennifer A. Tegfeldt (Registration No. 31,310), Steven E. Warner (Registration No. 33,326), Thomas J. O'Connell (Registration No. 33,202), Aaron C. Deditch (Registration No. 33,865), Penina Wollman (Registration No. 30,816), David L. Schaeffer (Registration No. 32,716), Jack S. Cubert (Registration No. 24,245), Mark A. Williamson (Registration No. 33,628), John T. Whelan (Registration No. 32,448), Patricia M. Drost (Registration No. 29,790), Jean K. Dudek (Registration No. 30,938), Raymond R. Mandra (Registration No. 34,382) and Dominick A. Conde (Registration No. 33,856), my attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

Address all correspondence to:

FITZPATRICK, CELLA, HARPER & SCINTO
277 Park Avenue
New York, N.Y. 10172
Telephone No. (212) 758-2400

**COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION**

(Page 2)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor MASAKI OKADA
Inventor's signature Masaki Okada
Date August 25, 1992 Citizen/Subject of Japan
Residence Yokohama-shi, Kanagawa-ken, Japan
Post Office Address c/o Canon Kabushiki Kaisha
30-2, 3-chome, Shimomaruko, Ohta-ku, Tokyo, Japan

Full Name of Second Joint Inventor, if any _____
Second Inventor's signature _____
Date _____ Citizen/Subject of _____
Residence _____
Post Office Address _____

Full Name of Third Joint Inventor, if any _____
Third Inventor's signature _____
Date _____ Citizen/Subject of _____
Residence _____
Post Office Address _____

Full Name of Fourth Joint Inventor, if any _____
Fourth Inventor's signature _____
Date _____ Citizen/Subject of _____
Residence _____
Post Office Address _____

Full Name of Fifth Joint Inventor, if any _____
Fifth Inventor's signature _____
Date _____ Citizen/Subject of _____
Residence _____
Post Office Address _____

Full Name of Sixth Joint Inventor, if any _____
Sixth Inventor's signature _____
Date _____ Citizen/Subject of _____
Residence _____
Post Office Address _____